


PRODUCT DATA SHEET

Reviewed 01/02/2016

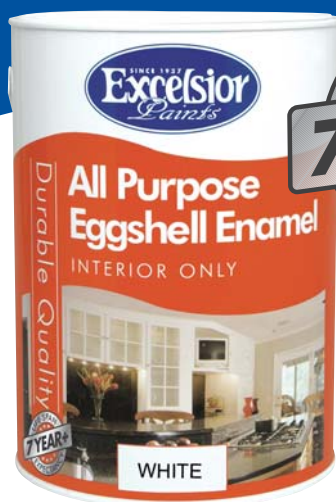

YOU CAN'T BUY A BETTER PAINT FOR LESS!™

All Purpose Eggshell Enamel

- SECTION A: DESCRIPTION**
A high quality eggshell enamel suitable for interior use as a protective or decorative coating. Eggshell finish does not highlight imperfections like High Gloss Enamel. Scrubbable and stain resistant, therefore perfect for bathrooms, kitchens or passages.
- SECTION B: COMPOSITION**
Alkyd Resin.
- SECTION C: PHYSICAL PROPERTIES**
- | | |
|---------------------|--------------------------------------|
| Colour: | White, Black and colour card colours |
| Appearance: | Semi-gloss (eggshell) |
| Gloss: | 18 - 23% @ 85° |
| Viscosity: | 80 - 85 Ku @ 25°C. |
| S.G.: | 1.27 - 1.32 |
| Mass Solids: | 60 - 65% |
| Volume Solids: | 40 - 45% |
| Shelf Live: | 12 Months |
| Storage Conditions: | Normal |
| Pack Size: | 1l, 5l, 20l |
- SECTION D: APPLICATION PROPERTIES**
- | | |
|----------------------|---|
| Method: | Brush, Roller or Airless Spray |
| Average Dft: | 50 microns (Recommended) |
| Spreading Rate: | 7 - 9m ² /l |
| Wet Film Thickness: | 90 - 100 microns |
| Number of coats: | 2 or 3 or as required |
| Drying Time: | Surface 3 - 4hrs, hard 16hrs max |
| Overcoating Time: | Between 16hrs and 72hrs |
| Cleaning Solvent: | Excelsior Turps |
| Recommended systems: | As a finishing and decorative coating on previously painted or new surface which have been well prepared or primed, for Interior use. |
- SECTION E: PRECAUTION**
- | | |
|--------------|---|
| Flash point: | 45°C |
| Toxicity: | Normal when used in well ventilated areas |
- SECTION F: SURFACE PREPARATION**
- All surfaces must be thoroughly clean, dry, free from grease, dirt or old flaking paint.
 - All loosely adhering material and powder, i.e. Distemper or Lime, must be removed and a coat of Excelsior SURFCON (Surface Conditioner) be applied and allow ± 18 hours to dry.
- NEW WOODWORK**
- Rub down with fine sandpaper and seal knots.
 - Prime with Excelsior WOOD PRIMER.
 - Follow with one coat Excelsior UNIVERSAL UNDERCOAT.
- NEW METAL SURFACES**
- Metal surfaces must be primed with the appropriate primer!
- A. NEW GALVANISED IRON**
- Remove storage oil with Excelsior GALVANISED IRON CLEANER and prime with one coat of Excelsior AQUA-METALPRIME ANTI-CORROSIVE PRIMER.



YOU CAN'T BUY A BETTER PAINT FOR LESS!™

All Purpose Eggshell Enamel.../continued

B. NEW MILD STEEL

- Prime with H2O PRIMER RED OXIDE etching water-based primer or AQUA METALPRIME ANTI-CORROSIVE PRIMER or Alkyd based GP RED OXIDE PRIMER or Excelsior ZP PRIMER (with anti-corrosive Zincphosphate pigments).

NEW PLASTER

- Once plaster is completely dry. Apply one coat of either:
- Alkyd Excelsior PLASTER PRIMER (low alkalinity) recommended for interior plaster.
- or high quality PLIOLITE PLASTER PRIMER (Goodyear France technology) for maximum priming benefits (high alkalinity).
- Pliolite Plaster must be used to validate the 7 year guarantee for exterior.

PREVIOUSLY PAINTED EMULSION (PVA/Acrylic) SURFACES

- Remove dirt and grime with SUGAR SOAP.
- Loose material must be removed with sandpaper.
- Seal powdery surfaces with Excelsior SURFCON (Surface Conditioner).

PREVIOUSLY PAINTED ENAMEL (Hi-gloss or Eggshell) SURFACES

- Sandpaper thoroughly.
- Apply one coat of Excelsior UNIVERSAL UNDERCOAT and allow ± 18 hours to dry.

SECTION G:

NOTE

No guarantees are implied by the recommendations contained herein; since the data sheet is issued for information only. Method of application, surface cleanliness, conditions of use etc. are beyond our control.